


MULTIMODE DUPLEX FIBER OPTIC PATCH CABLE



DESCRIPTION:

OM3 Multimode Duplex Fiber Optic Patch Cord

FEATURES:

- OM3 Multimode Duplex
- GR-326-Core
- RoHS Compliant
- Performance according to IEC
- Meets Telcordia Standards
- LC-LC Connector
- 1 m/2m/3m/5m/7m/10m/15m Lengths Available

TECHNICAL DATA


Fiber Type:	50/125µm
Polish	PC
Jacket	PVC (OFNR)
Overall Diameter	2.0mm
Optical Characteristics	
Typical Insertion Loss	≤0.20dB
Max Insertion Loss	≤0.25dB
Durability (500 Mating Times)	I.L. ≤0.25db
Tensile Load	7.0 kg
Bend Radius	3.8cm
Operating Temperature	-20°C ~ + 75°C
Storage Temperature	-20°C ~ + 85°C

Jacket Print

Optical Cable OM3 50/125 MM-2.0x4.1 OFNR

Manufacturer

Vertical Cable

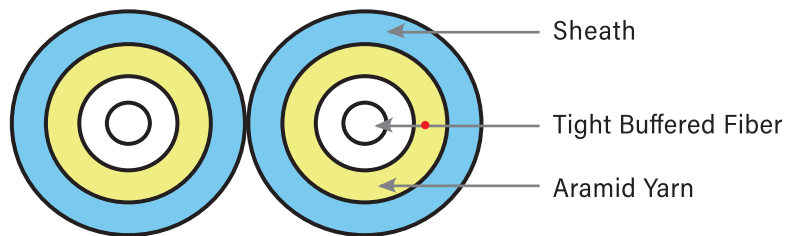

OM3 Cable

