

THIS DESIGN AND INFORMATION CONTAINED ON THIS PRINT IS THE PROPERTY OF VALLEY FAB CORPORATION. ANY REPRODUCTION, DUPLICATION OR TRANSFER OF THE PROPRIETARY CONTENT IS PROHIBITED WITHOUT WRITTEN PERMISSION.


STANDARD TOLERANCES:
(UNLESS OTHERWISE NOTED)

FRACTIONS ±1/16"
DECIMALS ±0.01"
ANGLES ±0.5°

NEWAVE
TOWER COMPONENTS. 503-792-3739
10910 PORTLAND RD. BROOKS, OR 97305

TOTAL WT: 35.45 LB
QTY:
FINISH: HDG
JOB #:

GRADE	DESCRIPTION		
ASTM A1011 SS GR 33	1-5/8" X 1-5/8" CHANNEL STRUT		
TITLE: HOT-DIPPED GALVANIZED, UNISTRUT, 20' LONG 1-5/8" X 1-5/8" CHANNEL STRUT	DRAWN BY: KY	DATE: 7/23/2021	CHK'D BY: -
SERIES: HARDWARE ACCESSORIES	SHEET: 1 OF 2		DRAWING NO. US20G

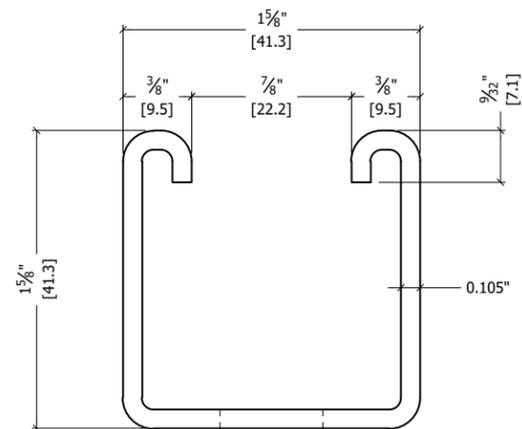


SIDE VIEW

MATERIAL: 12 GA (2.7mm)
STEEL

GRADE: ASTM A1011 SS
GR-33

FINISH: HOT-DIPPED
GALVANIZED - ASTM A123

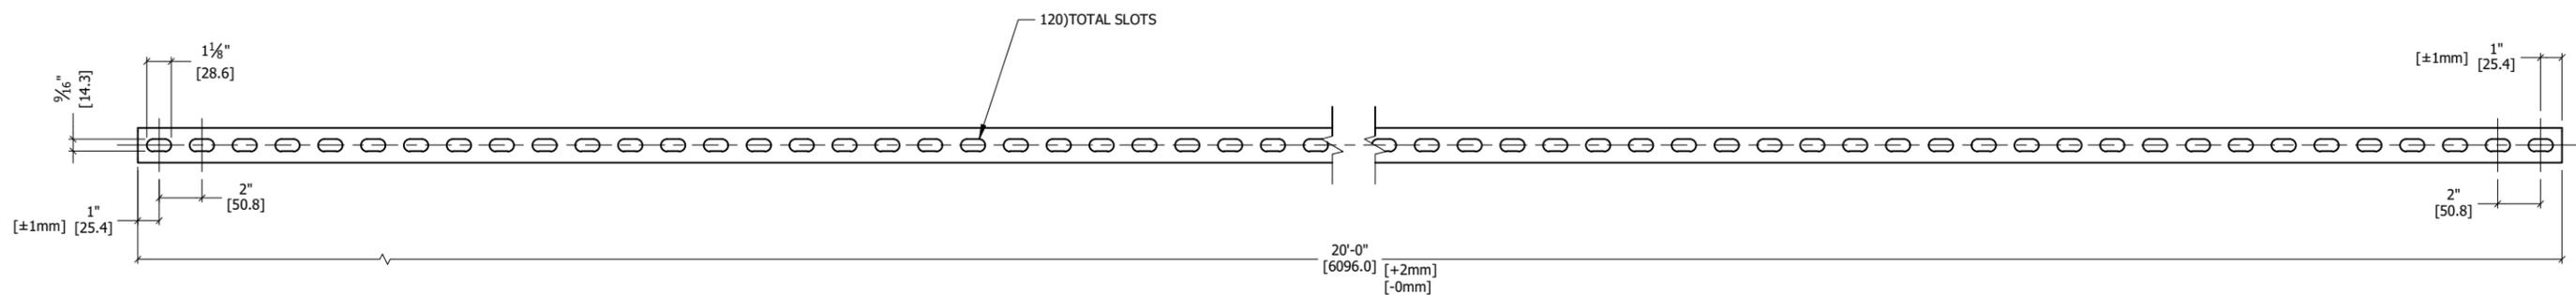

SLOT LAYOUT

THIS DESIGN AND INFORMATION CONTAINED ON THIS PRINT IS THE PROPERTY OF VALLEY FAB CORPORATION. ANY REPRODUCTION, DUPLICATION OR TRANSFER OF THE PROPRIETARY CONTENT IS PROHIBITED WITHOUT WRITTEN PERMISSION.

STANDARD TOLERANCES:
(UNLESS OTHERWISE NOTED)
FRACTIONS ±1/16"
DECIMALS ±0.01"
ANGLES ±0.5°



TOTAL WT: 35.45 LB
QTY:
FINISH: HDG
JOB #:

GRADE		DESCRIPTION		
ASTM A1011 SS GR 33		1-5/8" X 1-5/8" CHANNEL STRUT		
TITLE:		HOT-DIPPED GALVANIZED, UNISTRUT, 20' LONG 1-5/8" X 1-5/8" CHANNEL STRUT		DRAWN BY: KY
SERIES: HARDWARE ACCESSORIES		DATE: 7/23/2021		CHK'D BY: -
SHEET: 2 OF 2		DRAWING NO. US20G		