

ITEM	PART #	QTY	DESCRIPTION	LENGTH	FINISH	UNIT WT
1	RTNP-PF.01	12	3/8" PLATE		HDG	9.70
2	RT4007.01	6	ROOFTOP NON-PENETRATING TRAY WELDMENT		HDG	61.60
3	P23-168	7	2" STD PIPE	14'	HDG	51.20
4	P23-126	3	2" STD PIPE	10'-6"	HDG	38.40
5	P23-84	2	2" STD PIPE	7'	HDG	25.60
6	P23-72	2	2" STD PIPE	6'	HDG	21.94
7	P178-126	2	1 1/2" STD PIPE	10'-6"	HDG	28.57
8	US10G	6	1-5/8" X 1-5/8" CHANNEL STRUT		HDG	17.73
9	CX13R.01	8	3/8" PLATE		HDG	3.09
10	CXP1	16	3/8" PLATE		SEE W/O	4.81
11	AMCS-3.01	16	1/2" PLATE		SEE W/O	1.26
12	SFW-716G	24	1/4" PLATE		HDG	0.18
13	27-5321-005	16	GALV. 1/2" X 6" GR.5 CARRAGE BOLT			0.37
14	27-4310-005	16	GALV. 1/2" X 4" GR.5 FULL THREADED BOLT			0.27
15	27-4303-005	24	1/2" X 2" GR.5 HDG BOLT			0.16
16	27-5200-005	48	1/2 A36 HDG FLAT WASHER			0.04
17	27-5210-005	56	1/2 HDG LOCK WASHER			0.01
18	27-5222-005	56	1/2 HDG HEX NUT			0.04
19	TR38-9	12	3/8" X 9" A36 HDG ALL-THREAD	9"		0.28
20	27-5020-005	24	3/8 HDG LOCK WASHER			0.01
21	27-5030-005	24	3/8" HDG HEX NUT			0.02
22	27-6060-005	88	GALV. 1/2" X 2-1/2" X 4" GR-5 U-BOLT ASSEMBLY			0.76

THIS DESIGN AND INFORMATION CONTAINED ON THIS PRINT IS THE PROPERTY OF VALLEY FAB CORPORATION. ANY REPRODUCTION, DUPLICATION OR TRANSFER OF THE PROPRIETARY CONTENT IS PROHIBITED WITHOUT WRITTEN PERMISSION.

STANDARD TOLERANCES:
(UNLESS OTHERWISE NOTED)
FRACTIONS ±1/16"
DECIMALS ±0.01"
ANGLES ±0.5°

NEWAVE
TOWER COMPONENTS, 503-792-3739
10910 PORTLAND RD. BROOKS, OR 97305

TOTAL WT: 1434.25 LB


QTY:

FINISH:


JOB #:

REV	BY	DESCRIPTION	DATE
A	KY	SEE MODEL I PROPERTIES/COMMENTS	7/1/2021

TITLE: ROOFTOP NON-PENETRATING PIPE FRAME 14'-0" FACE W/ H-FRAME		DRAWN BY: JG	DATE: 1/7/2021	CHK'D BY: KY
SERIES: ROOFTOP/WALL MOUNTING	SHEET: 1 OF 2	DRAWING NO. RTNP-PF-14-H214		

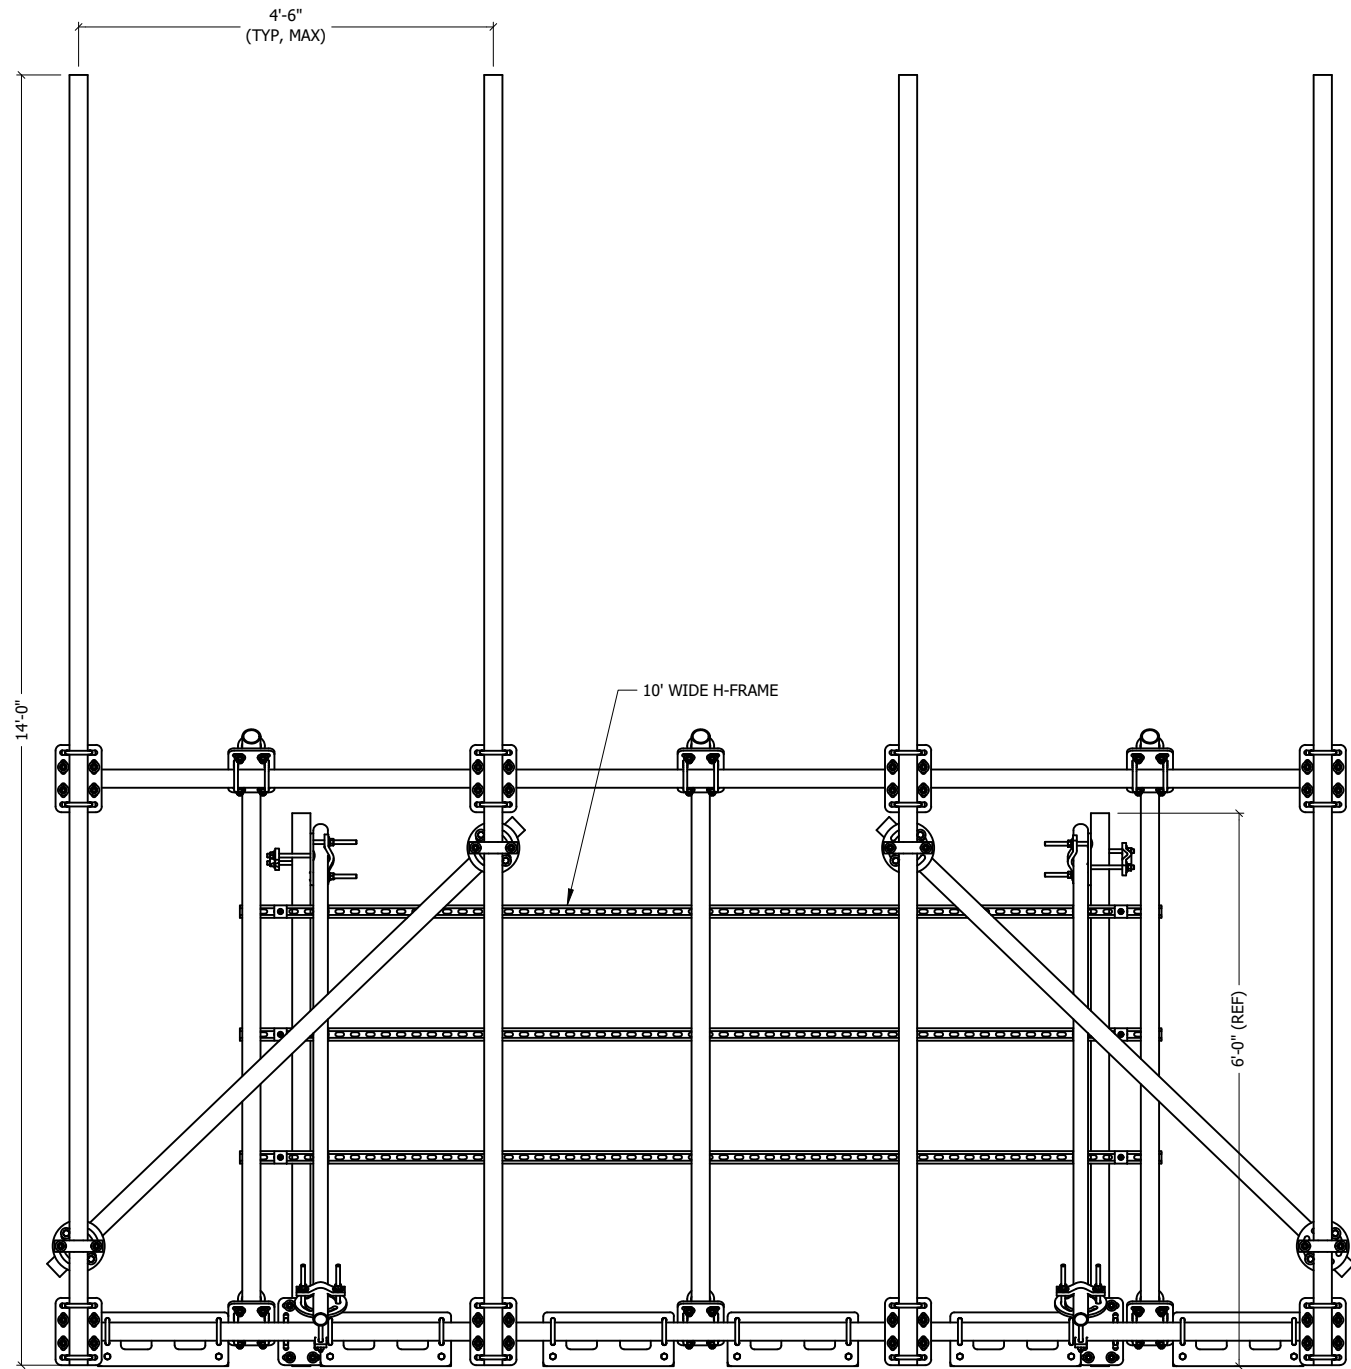

FRONT VIEW

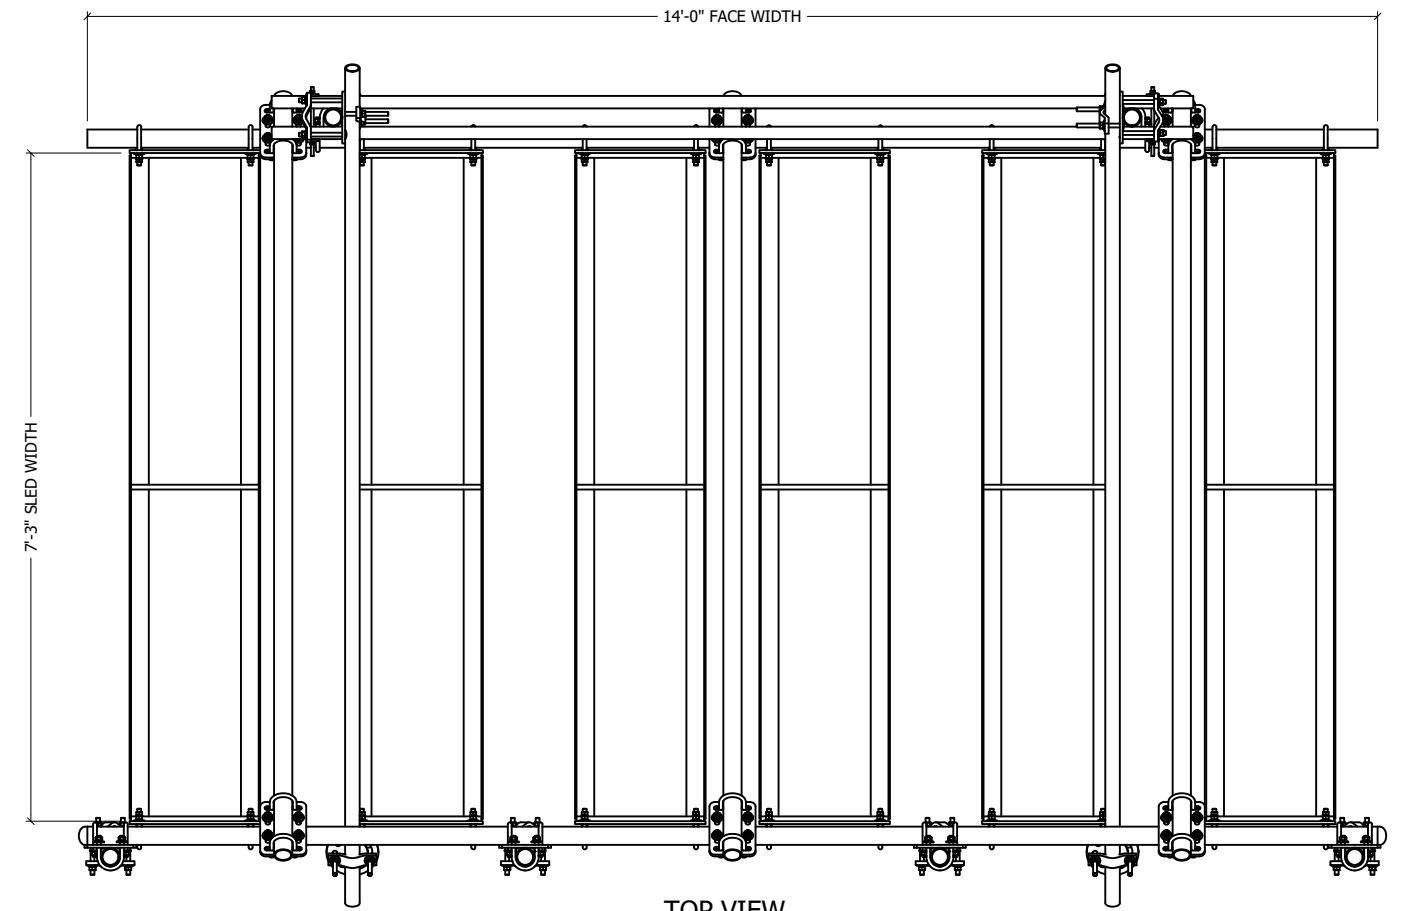

TOP VIEW

THIS DESIGN AND INFORMATION CONTAINED ON THIS PRINT IS THE PROPERTY OF VALLEY FAB CORPORATION. ANY REPRODUCTION, DUPLICATION OR TRANSFER OF THE PROPRIETARY CONTENT IS PROHIBITED WITHOUT WRITTEN PERMISSION.

STANDARD TOLERANCES:
(UNLESS OTHERWISE NOTED)
FRACTIONS ±1/16"
DECIMALS ±0.01"
ANGLES ±0.5°

NEWAVE
TOWER COMPONENTS, 503-792-3739
10910 PORTLAND RD. BROOKS, OR 97305

TOTAL WT: 1434.25 LB

QTY:

FINISH:

JOB #:

TITLE:
ROOFTOP NON-PENETRATING PIPE FRAME
14'-0" FACE W/ H-FRAME

SERIES: ROOFTOP/WALL MOUNTING

DRAWN BY:	DATE:	CHK'D BY:
JG	1/7/2021	KY

DRAWING NO.
RTNP-PF-14-H214

SHEET: 2 OF 2