


REV	BY	DESCRIPTION	DATE
A	KY	SEE ASSEMBLY PROPERTIES/ COMMENTS	11/23/2016

ITEM	PART #	DESCRIPTION	QTY	UNIT WT
1	RTNPF-TK-G14C	GALV. 1/4" HIGH TINSEL STRENGTH CHAIN, CUT @ 10' LONG	1	7.00
2	RT4007.05	NON-PENETRATING FRAME BENT PLT TIE BRACKET	2	0.90
3	27-4303-005	GALV. 1/2" x 2" GR.5 BOLT	2	0.16
4	27-5200-005	GALV. 1/2" FLAT WASHER	4	0.04
5	27-5210-005	GALV. 1/2" LOCK WASHER	2	0.01
6	27-5222-005	GALV. 1/2" HEX NUT	2	0.04
7	27-5180-005	GALV. 3/8" x 8" J-BOLT W/ 3/4" SPACING	2	0.31
8	27-5010-005	GALV. 3/8" FLAT WASHER	2	0.02
9	27-5020-005	GALV. 3/8" LOCK WASHER	2	0.01
10	27-5030-005	GALV. 3/8" HEX NUT	2	0.02

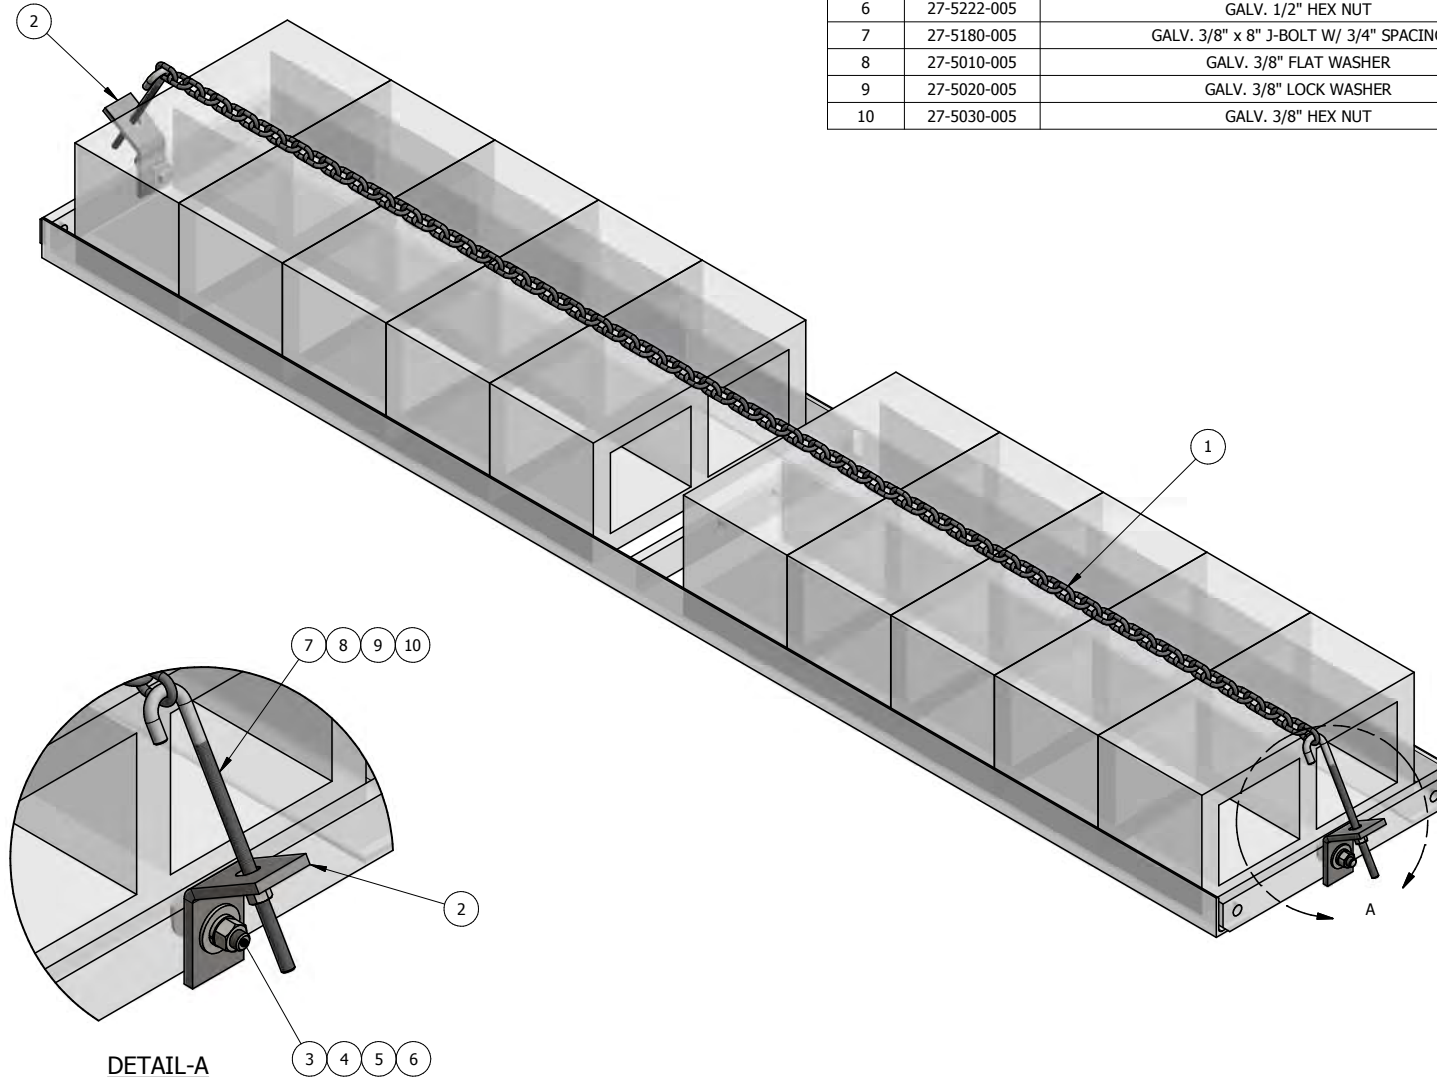

QTY:
CHK:

STANDARD TOLERANCES:
(UNLESS OTHERWISE NOTED)
FRACTIONS ±1/16"
DECIMALS ±.005"
ANGLES ±.5°

THIS DESIGN AND INFORMATION CONTAINED ON THIS PRINT IS THE PROPERTY OF NEWAVE TOWER COMPONENTS LLC. ANY REPRODUCTION, DUPLICATION OR TRANSFER OF THE PROPRIETARY CONTENT IS PROHIBITED WITHOUT WRITTEN PERMISSION.


NEWAVE
 TOWER COMPONENTS. 503-792-3739
 10910 PORTLAND RD. BROOKS, OR 97305

MATERIAL: AS SHOWN	DRAWN BY: KY	TITLE: NON-PENETRATING ROOF FRAME TRAY TIE DOWN KIT	
HOLES: AS SHOWN	CHECKED BY: -	SERIES: ROOFTOP/ WALL MOUNT	
FINISH: HDG	DATE: 11/23/2016	PART WT (BARE): 10.1 LB	DRAWING NO. RTNPF-TK SHEET: 1 OF 1